

# Laboratory Medical Deep Freezer

MODEL	TEMPERATURE RANGE	SET POINT	CAPACITY (LITRES)	EXT. DIMENSIONS (W x D x H cm)	DOOR TYPE
LP460NFA	0°C ÷ -40°C	-35°C (Adj)	100	45 x 55 x 104	Hinged Solid Door



## Backup Battery 36hrs – Dry Contact – Accuracy 0.1°C


**Colour:** Gray, White or any RAL colour  
**Structure:** Internal and external Steel Laminated Plate to assure a Bacteria-Static Activity (FINGER PRINT PROOF TECHNOLOGY™)  
**Insulation:** Polyurethane Foam, CFC FREE, 42Kg/m3, thick. 70mm  
**Refrigeration type:** Ventilated (NO-FROST)  
**Defrosting:** Automatic with condensing water evaporation  
**Electric power:** 1 / 220-240Volt / 50-60Hz  
**Compressor:** No.1 Hermetic Type - 350Watt – ¼ Hp  
**Refrigerant gas:** R452a ( Compatible with R507a and R404a )  
**Door:** : No. 1 Solid Door  
**Innr setting:** 2 Shelves/Grids OR 2 Drawers (Option)  
**Lighting:** NEON lamp active on opening door  
**Electronic controller:** Hi Efficiency display, res. 0,1°C  
**Castors and Wheels:** 4 adjustable feet

**Visual and acoustic alarm for:** - High and low temperature  
 - Open door  
 - Devices failure  
 - Probes failures

### OPTIONAL:

DTLSD3(1T) – Interactive Data Logger with USB – TFT 5”  
 SE / ESEDL - Manual or Electronic Lock with password  
 CHAUT - Self Closing Door with stopper at 95°  
 HLO – Insulated Hole for External Probe 25mm  
 LED - LED Lamp Inside  
 CS1 - Sliding Aluminum or S/Steel Drawers  
 SH1 - Sliding S/Steel Shelves  
 SMS - SMS Alarm System with auto-messages sending  
 WI-FI - Online connection with monitoring functions, e-mail error sending, remote managing and data/graphics download  
 GR1 – Graphic Chart Recorder 52 Paper Disks + 1 Spare Pen

### OPTIONS: INTERACTIVE DATA LOGGER TFT 5”

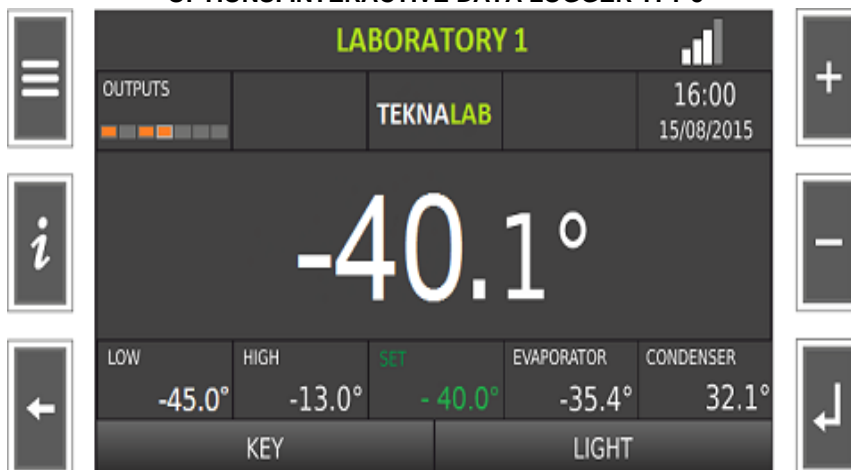

### OPTIONS: SLIDING S/S SHELVES

