

Medical Unit 2 Comp./2 Temp. for Vaccine and Ice Packs

MODEL	TEMPERATURE RANGE	SET POINT	CAPACITY (LITRES)	EXT. DIMENSIONS (W x D x H cm)	DOOR TYPE
MT 4000CB	0°C ÷ -30°C / +8°C ÷ +2°C	-20°C / +4°C	110+220	67 x 64 x 204	Solid Hinged

BACK-UP BATTERY Autonomy 48hrs – DRY CONTACT BMS CONNECTION (NO,NC)



Model MT 4000CB – 165+165lts



Model MT 4102CB – 110+220lts

Colour: Gray, White or any RAL colour

Structure: Internal and external Steel Laminated Plate with FINGER PRINT PROOF TECHNOLOGY™ to assure a Bacteria-Static Activity

Insulation: Polyurethane Foam, CFC FREE, 42Kg/m³, 60mm

Refrigeration type: Ventilated Forced Air (NO-FROST)

Defrosting: Automatic, condensing water evaporation

Electric power: 1 / 210-240Volt / 50-60Hz

Electrical characteristics: Shortage Protection with Power Stabilizer (±30 volts)

Compressor: No. 1 Hermetic – 400Watt – ¾ HP

Refrigerant gas: R452a (R404a, R407a compatible)

Door : No 2 SOLID Doors

Inner setting: 1+4 or 3+3 Shelves/Grids ; 2 compartments

Lighting: NEON lamp active on opening door

Elect. controller: High efficiency display, Accuracy 0,1°C

Castors and Wheels: 4 Wheels + 2 adjustable feet

NATURAL GAS R290 AVAILABLE

Main Visual and acoustic alarm for: - Hi- LOW temperature

- Open door
- Devices failure
- Probes failures

MAIN OPTIONS:

DTLSD3-2T – Interactive Data Logger TFT5", RGB, USB, SD

PHARMA FLEX – Data Logger BLUETOOTH with WI-FI

GR2 – Graphic Chart Recorder 2 T. with 52 weekly paper charts

SE/EEDL - Key or Electronic Lock with Password

HLO – Insulated Hole for External Probe Ø 25 mm

LED – LED lights inside (both compartments), 6000K

CS1 - Sliding Aluminum or S/S Drawers with Transparent front side

SH1 - Sliding S/S AISI 304 Scotch Brite Shelves

SMS - SMS Alarm System working with SIM Card


TR–Tropical Version, Temp.+48°C max, RH 92% Max

WI-FI/3G – Remote connection, on-line monitoring


WB – Steel Wire Baskets PVC Coated

RS485 – Serial Port for BMS/PC Connection

OPTION: INTERACTIVE DATA LOGGER TFT 5"- RGB COLORS - 2 TEMPERATURES

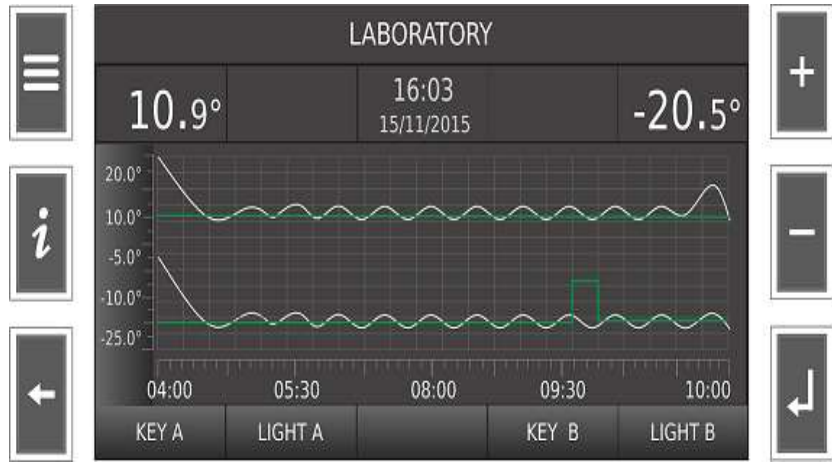

INNER CONFIGURATIONS
STANDARD SET UP WITH GRIDS

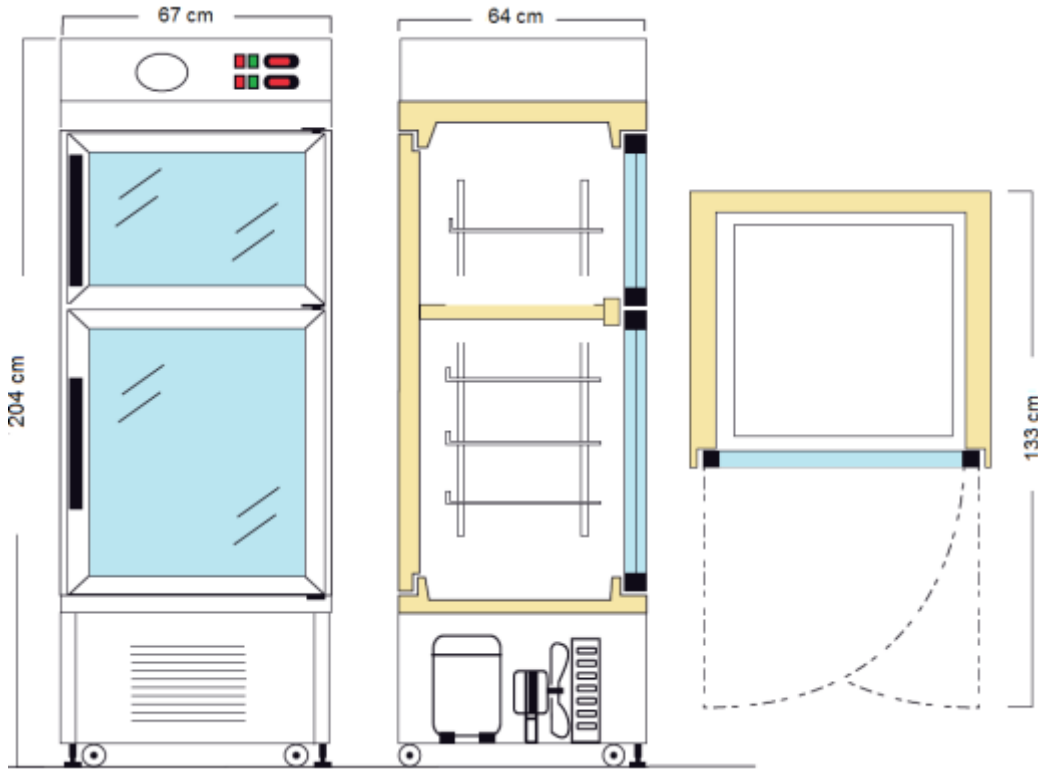

OPTIONS: SLIDING S/S SHELVES (SH1)

SLIDING DRAWERS (CS1)

WIRE BASKETS (WB)

