

Pharmacy Medical Freezer

MODEL	TEMPERATURE RANGE	SET POINT	CAPACITY (LITRES)	DIMENSIONS (WxDxH) EXT.	DIMENSIONS (WxDxH) INT.	DOOR TYPE
PM 5010NFN	0°C ÷ -25°C (Adj)	-20°C (Adj)	590	67 x 89 x 204 cm	55 x 77 x 135 cm	Triple Glass Door



DRY CONTACT - Back-up Battery 36hr - ACCURACY 0.1°C

Colour: Gray, White or any RAL colour
Structure: Internal and external S/Steel Laminated Plate with FINGER PRINT PROOF TECHNOLOGY™ to assure a Bacteria-Static Activity
Insulation: Polyurethane Foam, CFC FREE, 42Kg/m³, 60mm
Refrigeration type: Ventilated (NO-FROST), Fast Recovery
Defrosting: Automatic with condensing water evaporation, HOT GAS
Electric power: 1 / 210-240 Volt / 50-60Hz
Power Protection: Shortage Protection, Power Stabilizer with Linear Voltage Regulator for power fluctuations (+/-20 Volt)
Compressor: No.1 Hermetic Type - 600Watt - ½ Hp
Refrigerant gas: R452a (Compatible with R507a, R404a)
Door: No1 Solid Door with Electric Heater on frame and Silicon Magnetic Gasket Double Fold
Inner setting: 5 to 8 Shelves/Grids/Drawers
Lights: LED Light 130cm (option)
Electronic controller: Hi Efficiency display – Probe PT100 Shielded
Castors and Wheels: 4 Swivel Wheels + 2 adjustable feet

Main Visual Acoustic Alarm for:

- HI and LOW temperature
- Open door
- Devices failure
- Probes failures

MAIN OPTIONS and ACCESSORIES:

DTLSD3(1T) - Interactive Data Logger TFT 5" with USB/SD, Predictive Diagnosis, etc.
RG1 - Graphic Chart Recorder with 52 weekly Paper Disk and 1 Spare Pen.
TC - Twin Compressor, alternate work cycles, auto switch over if primary compressor is faulty
ESEDL - Electronic Lock with Password (Access Log)
SE - Key Lock with 2 keys
CHAUT - Self Closing Door with stopper at 95°
HLO - Hole for External Probe Ø 25mm
LED - LED Lamp Inside 130 cm long High Bright
CS2 - Sliding Aluminum or S/Steel Drawers on bearings, edge 10cm H, Max Load 55Kg
SH2 - Sliding INOX S/S perforated/plane Shelves on bearings, Max Load 55Kg
PIS - Adjustable S/Steel Plane Perforated shelves
SMS - SMS Alarm System in case of errors.
WI-FI/3G - Online connection for Alarm Messages and Real Time monitoring, Graphics and Report Download
HUC - Humidity Controller
TR - Tropical Cooling System, till 48°C and 95% RU
NFOG - NO FOGG Glass Technology
RS485 - Serial Port for PC/BMS Connection (only with DTLSD3)


Version with DRAWERS and CHART RECORDER



OPTION INTERACTIVE DATA LOGGER TFT 5" (DTLSD3)



INNER CONFIGURATIONS STANDARD SET UP WITH GRIDS

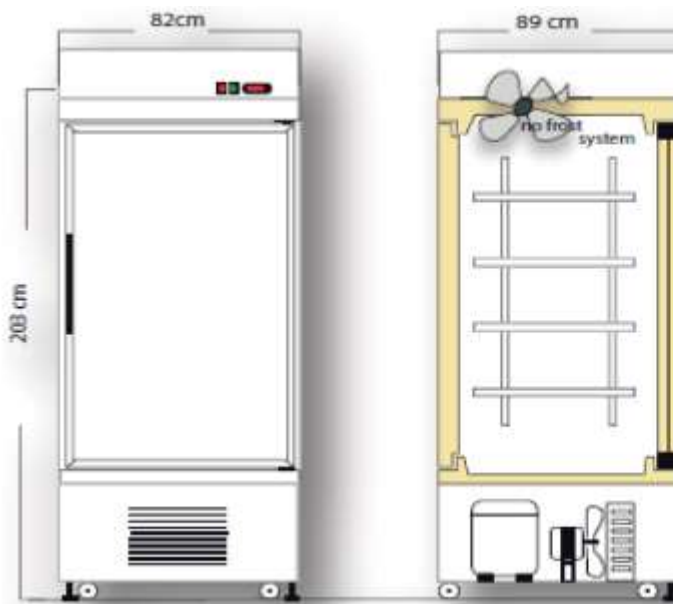

PM 5010 NFN



Nr 5 665 x 680 mm

OPTIONS:

SLIDING S/S SHELVES



SLIDING ALUMINUM or S/S DRAWERS

