

Pass-Through Refrigerator Small Size

no frost system
Refrigerator cabinet to preserve pharmaceutical and biological materials.


MODEL	TEMPERATURE RANGE	CAPACITY (LITRES)	EXTERNAL DIMENSIONS (W x D x H cm)	DOOR TYPE
0041 PT	10°C ÷ +2°C	210	67 x 64 x 132/140	Front and Rear Doors





DRY CONTACT – BACK-UP BATTERY (ups) – ACCURACY 0.1°
Colour: Grey, White or any RAL colour
Structure: Internal and External Steel Laminated Plate with FINGER PRINT PROOF TECHNOLOGY™
Insulation: Polyurethane Foam, CFC FREE, 42Kg/m3, Thick. 60mm
Refrigeration type: Ventilated (NO-FROST)
Defrosting: Automatic with condensing water evaporation
Electric power: 1 / 220-240Volt / 50-60Hz
Compressor: No 1 Hermetic Type – 1/3 HP – 450 Watts
Refrigerant gas: R452a (R404a and R507a compatible)
Door: No. 2 Solid or Glass Hinged Doors with alternate opening
Inner setting: 3/4 Adjustable Shelves or Grids
Lighting: Neon or LED (optional) lights
Electronic controller: Hi Efficiency display, res. 0,1°C
Castors and Wheels: 4 wheels + 2 adjustable feet
Visual and acoustic alarm for: - HI and LOW temperature
 - Open door
 - Devices failure
 - Probes failures
 - Compressor failure
 - Condenser failure

MAIN ACCESSORIES & OPTIONS:
 DTLSD3 – Interactive Data Logger Touch Screen Velex 5”
 SE / ESEDL - Manual or Electronic Lock alternate opening
 CHAUT - Self Closing Door with stopper at 95°
 LED– Led light when doors open, 60mm long, High Brightness
 HLO - Hole for External Probe Ø 25mm
 PIS – Adjustable S/Steel Plane Shelves AISI 304
 SH1 - Sliding Movable S/Steel AISI 304 Shelves
 WI-FI – Auto Sending Alarm System and Online connection
 3G/SMS – Online connection for remote monitoring system and option SMS in case of alarms and warnings
 GR – Remote cooling System

OPTION INTERACTIVE DATA LOGGER TFT 5”

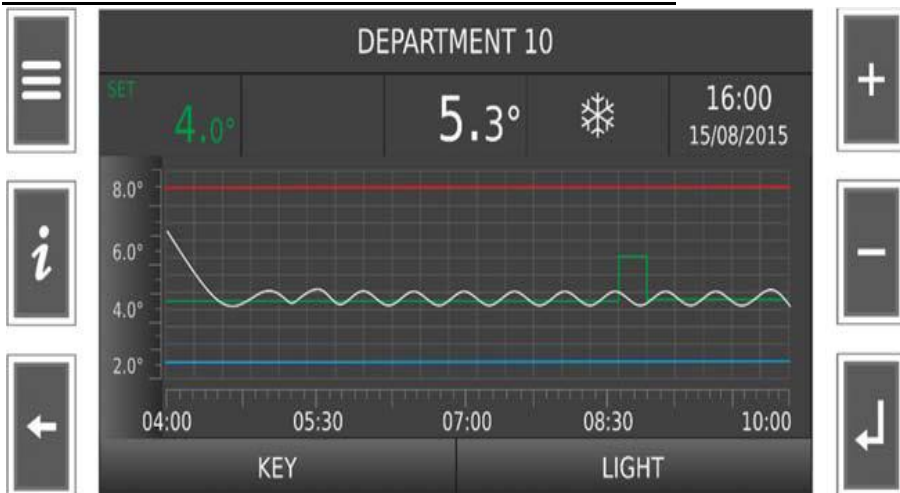

Available GLASS or SOLID DOORS

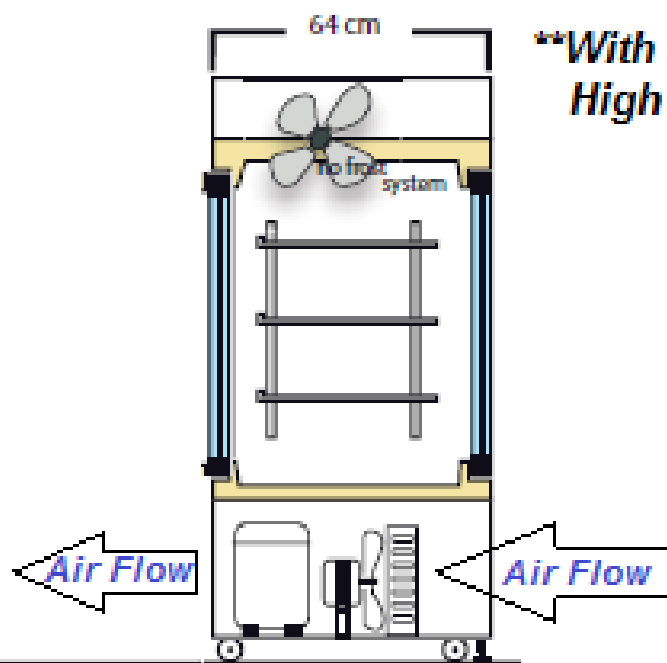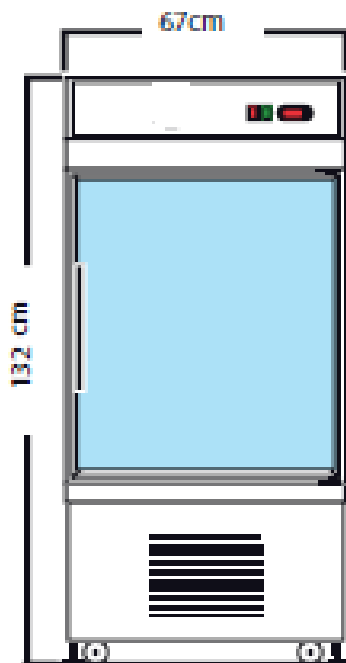

****With DTLSD3 or RG1 the High is 140cm**

