

Refrigerator cabinet to preserve pharmaceutical and biological materials.

Pharmacy Freezer Bench-Top

MODEL	TEMPERATURE RANGE	SET POINT	CAPACITY (LITRES)	EXTERNAL DIMENSIONS (W x D x H cm)	DOOR TYPE
LP460NFN	+5°C ÷ -25°C	-20°C (Adj)	100	46 x 55 x 108	Glass Door




Colour: Gray, White or any RAL colour
Structure: Internal and external S/S Steel Laminated Plate to guarantee a Bacteria-Static Activity
Insulation: Polyurethane Foam, CFC FREE, 42Kg/m3, thick. 60mm
Refrigeration type: Ventilated (NO-FROST)
Defrosting: Automatic with condensing water evaporation
Electric power: 1 / 210-240Volt / 50-60Hz
Electrical characteristics: Short-Circuit Protection, Power Stabilizer with Linear Regulation of Voltage for not constant voltage(+/- 20 Volts) and in case of an AC-DC use.
Compressor: No.1 Hermetic Type - 250Watt - ½ HP
Refrigerant gas: R452A (R507A and R404A compatible)
Door: : No 1 Glass Door
Inner setting: 3 Shelves/Grids
Lighting: NEON lamp active on opening door
Electronic controller: Hi Efficiency display, res. 0,1°C
Castors and Wheels: 4 Wheels + 2 adjustable feet

Visual and acoustic alarm for:

- High and low temperature
- Open door
- Devices failure
- Probes failures

OPTIONAL:

- DTLSD3(1T) – Interactive Data Logger Touch Screen 5"
- SE / ESEDL - Manual or Electronic Lock
- UPS - Back-up Battery System
- CHAUT - Self Closing Door
- HELO - Hole for External Probe
- LED - LED Lamp Inside
- CS1 - Sliding Aluminum Drawers
- SH1 - Sliding S/Steel Shelves
- SMS – Short Message System automatic sending.
- 3G/WI-FI – On line connection, alarm sending system, monitoring system online
- RG – Graphic Chart Recorder Inkless

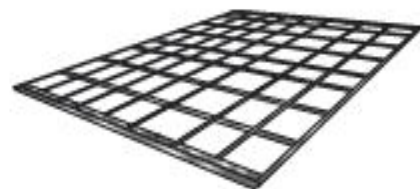

Assetto interno con ripiani a griglia e supporti

Inner settings grid shelves with supports

